

SYMBIO 5201R RECEIVER

FRONT



BACK



- 1 power switch**
- 2 classroom-friendly color**
Helps make the product less intimidating for teachers
- 3 two channels for more dynamic teaching**
Encourage student participation with a pass-around mic; or amplify two teachers at the same time
- 4 microphone indicator lights**
Offer clear visual confirmation of signal reception
- 5 power on, ready light**
- 6 external sensor ports**
Get great signal pickup in almost any classroom with convenient ceiling or wall sensors
- 7 audio out jack**
High quality 1/4in jack for connection to practically any standard amplifier
- 8 mic/line switch**
Match your amplifier's level requirements instantly
- 9 DC input**



SPECIFICATIONS

Transmission type: Infrared

Receiving frequency: 2.3MHz & 2.8MHz

Frequency response: 50Hz to 10kHz

Signal to Noise: > 65dB (system)

THD: < 1% @ 1kHz

Power Supply: 12V @ 500mA

Size (wxhxd): 14 x 4 x 19.25 cm/5.5 x 1.62 x 7.75 in

Weight: 766g/1.7lbs.

Mic level out: 0V to 100mVrms at maximum volume & maximum deviation (typical)

Line level out: 0V to 1Vrms at maximum volume & maximum deviation (typical)

User controls:

- Power
- Microphone A volume
- Microphone B volume
- Output level

Inputs/outputs:

- Input power jack
- 3 RCA jacks for external sensor connection
- 1/4in audio out jack

5201R ACCESSORIES



receiver power supply

940TM TRANSMITTER/MICROPHONE



SPECIFICATIONS

Transmission type: Infrared

Transmitting frequency: 2.3MHz & 2.8MHz (switchable)

Microphones: dual uni-directional cardioid

Battery life: minimum 8 hours

Battery type: single AA, 2500mAh rechargeable NiMH

Operating range: 18.5m/60ft line-of-sight (typical)

Size (wxhxd): 11 x 6 x 2.5 cm/4.5 x 2.5 x 0.9 in

Weight: 85g/3.0oz (with battery)

User controls:

- On/off
- mute
- channel A/B

Inputs/outputs:

- 2.5mm mic input
- 3.5mm aux input
- 1.3mm DC charge jack

1 totally wireless

Combination transmitter/microphone design eliminates the need for any cords

2 amazing sound quality

Patented dual-mic system ensures natural sound quality

3 maximum comfort

Efficient single-cell battery design is 25-40% lighter than competitor models

4 a/b channel selector

Conveniently switch between microphone channels

5 portable audio interface

A 3.5mm auxiliary input jack lets you use the transmitter/microphone to transmit audio from any secondary source, such as a TV, DVD, CD, computer, or MP3 player

6 audio mute switch

A convenient mute switch allows for private conversations

7 auxiliary microphone input

For teachers who prefer boom mics

8 smart charge security

SMARTCHARGE technology protects against charging incompatible batteries. Alkaline batteries may be used in an emergency, but the microphone will only charge the "silver-sleeve", auto-sensing battery that comes with your microphone.

9 4-way indicator light

10 on/off switch


940TM ACCESSORIES



SMARTCHARGE NiMH rechargeable battery



aux-in cable



boom mic

950H PASS-AROUND MICROPHONE AND DROP-IN CHARGER



950H MICROPHONE

1 fits kids' small hands

Less than 15cm/6in tall, this durable kid-sized mic is much easier for students to use

2 comfortable hands-free option

Easy, comfortable lavalier clip makes reading in front of class simple and lets the 950H double as a very lightweight teacher mic

3 3-way indicator light

4 on/off switch

5 smart charge security

SMARTCHARGE technology protects against charging incompatible batteries. Alkaline batteries may be used in an emergency, but the microphone will only charge the "silver-sleeve", auto-sensing battery that comes with your microphone.

6 a/b channel and mic gain selectors

(inside battery compartment)

7 name plate

8 optional charge input jack

9 portable audio interface

A 3.5mm auxiliary input jack lets you use the transmitter/microphone to transmit audio from any secondary source, such as a TV, DVD, CD, computer, or MP3 player

950C CHARGER

10 energy efficient drop-in charging

Charges both the 940TM and 950H microphones neatly and securely. Powered by an ENERGY STAR® qualified battery charger.

11 3-way charging indicator lights



SPECIFICATIONS

Transmission type: infrared

Transmitting frequency: 2.3MHz & 2.8MHz (switchable)

Battery type: single AA, 2500mAh rechargeable NiMH

Battery life: minimum 5 hours

Operating range: 12.2m/40ft, line of sight (typical)

Size (wxhxd) (mic): 14.6 x 2.8 x 3.5 cm/5.7 x 1.1 x 1.4 in

Weight (mic): 74g/2.6oz (with battery)


User controls (mic):

- On/off
- Channel A/B
- Mic gain – 3 settings

Inputs/outputs (mic):

- 3.5mm aux input, stereo summing
- 1.3mm DC charge jack

950H ACCESSORIES



SMARTCHARGE NiMH rechargeable battery



charger power supply



lavalier clip

LOCATIONS

Australia

Phonic Ear
12/97 Castlemaine Street
Milton Qld 4064
Australia
Freecall: 1 800 PHONIC
fax: 1300 746 642
web: www.gofrontrow.com.au

Canada

FrontRow
6950 Creditview Road, Unit 1
Mississauga, ON L5N 0A6
toll-free: 800.340.9894
tel: 905.461.5300
fax: 905.677.7760
web: www.gofrontrow.com

Scandinavia

Phonic Ear A/S
Kongebakken 9
2765 Smørum
Denmark
tel: +45 3917 7101
fax: +45 3927 7900
web: www.gofrontrow.com
www.phonicear.com

New Zealand


Oticon New Zealand Ltd.
142 Lambton Quay
P.O. Box 9128
Te Aro, Wellington
toll-free: 800 OTICON
toll-free fax: 00800 FAX OTICON
web: www.oticon.co.nz

United Kingdom

PC Werth Limited
Audiology House
45 Nightingale Lane
London SW12 8SP
tel: 020 8772 2700
web: www.soundfield.info

USA/Global

FrontRow
Corporate Headquarters
2080 Lakeville Highway
Petaluma, CA 94954-6713
toll-free: 800.227.0735
tel: 707.769.1110
fax: 707.769.9624
web: www.gofrontrow.com

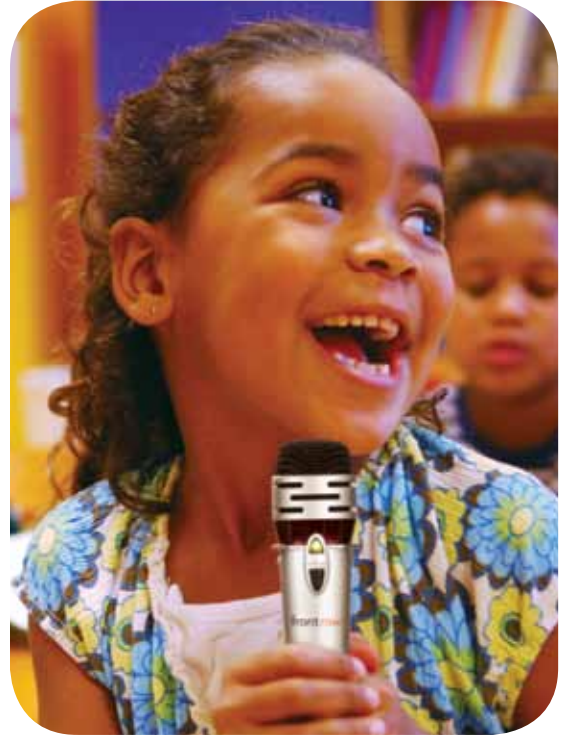

frontrow™