


TOGO 925RS COMBINATION RECEIVER/SPEAKER ARRAY



SPECIFICATIONS

- Transmission type:** FM (F3E)
- Receiving frequency:** 216.025 - 216.875 MHz
- Frequency response:** 100Hz-9kHz (at rated output)
- TDH:** <1% (at rated output) @ 1kHz
- Signal-to-noise:** >70db at rated output (system)
- Maximum audio output power:** Maximum 36W RMS @ 4Ω x 2
- Power supply:** AC 110-200V ~50-60Hz, 1A max
- Battery:** NiMH rechargeable
- Battery life:** 6.5 hours (rechargeable)
- Recharging time:** 8 hours
- Input:** 1 x aux-in, 3.5mm mono
- Output:** 1 x aux-out, 3.5mm mono
- User controls:**
 - Channel A/B on/off/volume
 - Channel A/B channel selector
 - aux-in volume
 - aux-out volume
 - OptiVoice
 - main power
- Size (wxdxh):** 183 x 85 x 750 mm / 7.2 x 3.4 x 29.5 in
- Weight:** 5.7kg / 12.5lbs.

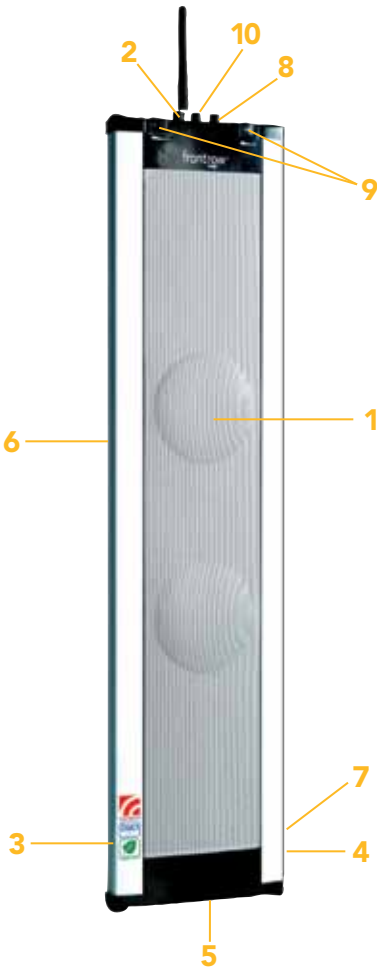

- 1 room-filling sound quality in a single unit**
The precision-mounted two-speaker line array reinforces and spreads more sound energy throughout the listening zone, making it the only all-in-one sound system able to cover an entire classroom.
- 2 optimize speech clarity**
The simple 3-position OptiVoice switch controls a sophisticated 12-band equalizer, pre-programmed to optimize speech clarity by emphasizing speech frequencies most critical to comprehension
- 3 power cable socket**
- 4 on/off power switch**
- 5 table stand attachment**
- 6 integrated handle for transport**
- 7 optional built in battery for outdoor amplification**
- 8 auxiliary audio input for computer, MP3 players**
- 9 two channels for more dynamic teaching**
- 10 auxiliary output**

925RS ACCESSORIES



Channel/frequencies for U.S. and Canada

Channel#	Channel A	Channel#	Channel B
41	216.025 MHz	51	216.525 MHz
42	216.075 MHz	52	216.575 MHz
43	216.125 MHz	53	216.625 MHz
44	216.175 MHz	54	216.675 MHz
45	216.225 MHz	55	216.725 MHz
46	216.275 MHz	56	216.775 MHz
47	216.325 MHz	57	216.825 MHz
48	216.375 MHz	58	216.875 MHz

Channel/frequencies for e.g. Denmark, Norway, Sweden, Germany, Finland and Iceland

Channel#	Channel A	Channel#	Channel B
15	173.400 MHz	26	173.640 MHz
91	173.8125 MHz	94	173.8625 MHz
93	173.9625 MHz	92	173.9125 MHz
84	174.0750 MHz	87	174.275 MHz
77	174.175 MHz	90	174.5250 MHz
78	174.325 MHz	55	174.6000 MHz
89	174.425 MHz	63	174.8500 MHz
59	174.7000 MHz	67	175.0000 MHz

Channel/frequencies for e.g. England, New Zealand, Australia and The Netherlands

Channel#	Channel A	Channel#	Channel B
13	173.350 MHz	30	173.750 MHz
15	173.400 MHz	32	173.800 MHz
17	173.450 MHz	34	173.850 MHz
21	173.500 MHz	35	173.900 MHz
24	173.550 MHz	36	173.950 MHz
25	173.600 MHz	37	174.000 MHz
27	173.650 MHz	38	174.050 MHz
29	173.700 MHz	40	174.100 MHz

TOGO 925C CHARGING STAND



- 1 convenient drop-in charging
- 2 3-way indicator lights



SPECIFICATIONS

Power supply: AC adaptor (DC 12V / 0.5A)

Recharging time: NiMH (1600mA), 6 hours

Size (wxhxd): 230 x 47 x 135 mm / 9 x 1.9 x 5.3 in

Weight: 360g/12.7oz

TOGO 925T BODY-WORN TRANSMITTER



- 1 **your choice of mics**
Connect wind-resistant boom or earhook mics or inconspicuous lapel mics
- 2 **easy to locate on/off/standby switch**
- 3 **2-way indicator light**
- 4 **belt clip**
- 5 **channel selector**



SPECIFICATIONS

Carrier frequency range: 216.025 - 216.875 MHz

Modulation: FM (F3E)

Operating range: > 34m / 110ft

RF output: <15mW

TDH: <0.5%

Dynamic range: 100dB

Size (wxhxd): 65 x 90 x 25 mm / 2.5 x 3.5 x 1 in

Weight: 51g / 1.8oz

Controls: on/mute/off/channel selector

Input/output: 2.5mm microphone input jack

Battery type: 2 AA NiMH rechargeable (1600mA) or 2 AA alkaline disposable


Battery life: NiMH rechargeable typically 12 hours, disposable alkaline typically 15 hours

Recharging time: 6 hours

925T ACCESSORIES



NiMH rechargeable battery
AT0807



boom mic

TOGO 925H HANDHELD MICROPHONE/TRANSMITTER



- 1 **2-way indicator light**
- 2 **on/off switch**
- 3 **channel selector**

925H ACCESSORY



NiMH rechargeable battery
AT0807



SPECIFICATIONS

Carrier frequency range: 216.025 - 216.875 MHz

Modulation: FM (F3E)

Operating range: > 34m / 110ft

RF output: <15mW

TDH: <0.5%

Dynamic range: 100dB

Dimensions (dia x h): 54 x 237mm / 2.1 x 9.3 in

Weight: 230g / 8.1 oz

Controls: on/mute/off/channel selector

Battery type: 2 AA NiMH rechargeable (1600mA) or 2 AA alkaline disposable

Battery life: 12 hours (rechargeable), 15 hours (alkaline)

Recharging time: 6 hours

LOCATIONS

Australia

Phonic Ear
12/97 Castlemaine Street
Milton Qld 4064
Australia
Freecall: 1 800 PHONIC
fax: 1300 746 642
web: www.gofrontrow.com.au

Canada

FrontRow
6950 Creditview Road, Unit 1
Mississauga, ON L5N 0A6
toll-free: 800.340.9894
tel: 905.461.5300
fax: 905.677.7760
web: www.gofrontrow.com

Scandinavia

Phonic Ear A/S
Kongebakken 9
2765 Smørum
Denmark
tel: +45 3917 7101
fax: +45 3927 7900
web: www.gofrontrow.com
www.phonicear.com

New Zealand

Oticon New Zealand Ltd.
142 Lambton Quay
P.O. Box 9128
Te Aro, Wellington
toll-free: 800 OTICON
toll-free fax: 00800 FAX OTICON
web: www.oticon.co.nz

United Kingdom

PC Werth Limited
Audiology House
45 Nightingale Lane
London SW12 8SP
tel: 020 8772 2700
web: www.soundfield.info

USA/Global

FrontRow
Corporate Headquarters
2080 Lakeville Highway
Petaluma, CA 94954-6713
toll-free: 800.227.0735
tel: 707.769.1110
fax: 707.769.9624
web: www.gofrontrow.com



frontrow™